

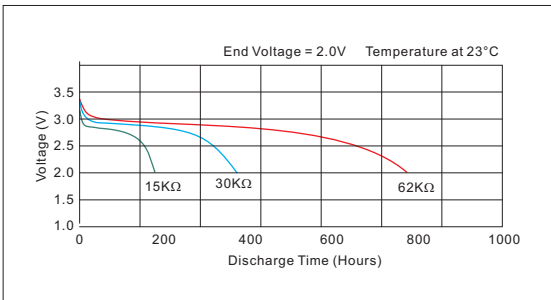


CR1225 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = $\phi 10.4$ B = $\phi 12.5^{+0.02}$ C = 1.6 D = $2.5^{+0.03}$</p> <p>Dimension: mm</p> 
Nominal Capacity	50mAh	
Continuous Standard Load	62K Ω	
Operating Temperature	-20° - 60°C	
Weight	0.9g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics




Temperature Characteristics

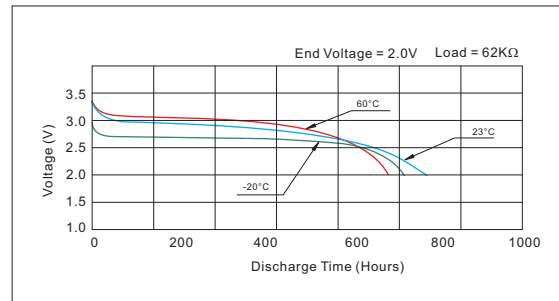


Load vs. Operating Voltage

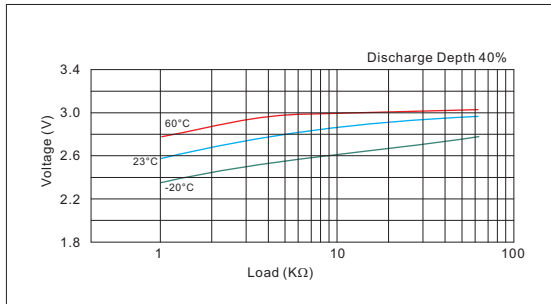

Load vs. Capacity

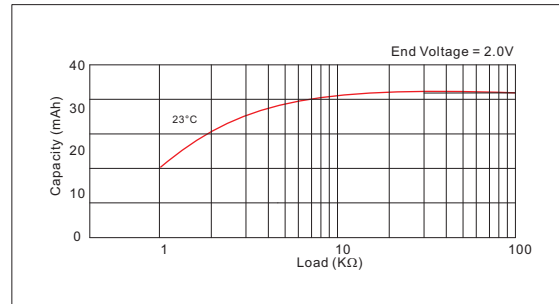

Pulse Discharge Characteristics

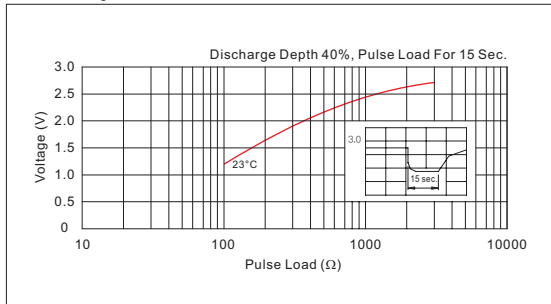

Storage Characteristics

