


CR1616 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	50mAh
Continuous Standard Load	30K Ω
Operating Temperature	-20° - 60°C
Weight	1.2g
Max. Continuous Discharge	0.2mA
Max. Pulse Discharge	5mA




A = ϕ 13.8
B = ϕ 16.0^{+0.03}_{-0.03}
C = 1.3
D = 1.6^{+0.03}_{-0.03}


Dimension: mm




Discharge Characteristics

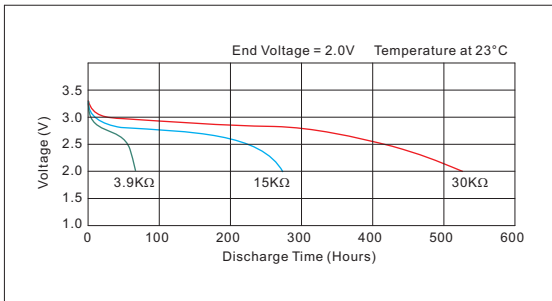


Temperature Characteristics

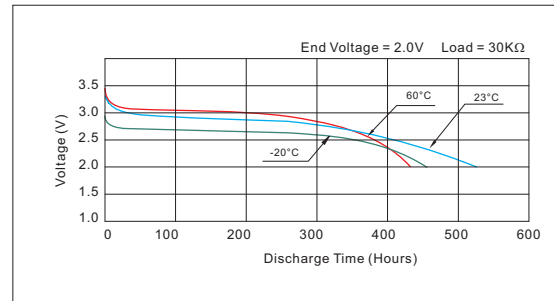


Load vs. Operating Voltage

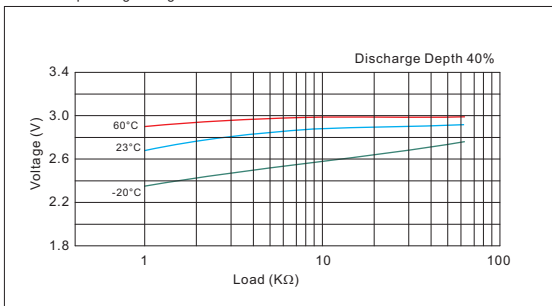

Load vs. Capacity

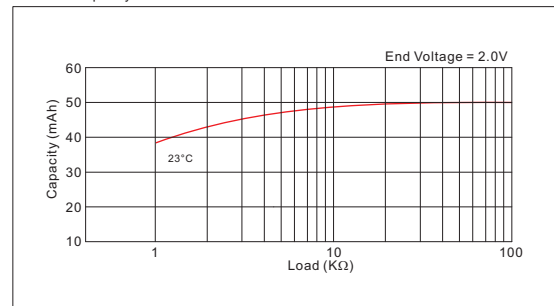

Pulse Discharge Characteristics

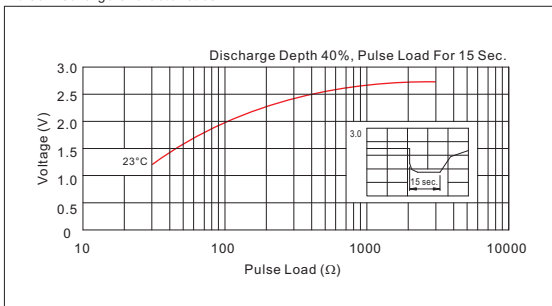

Storage Characteristics

