


CR1632 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	<p>A = $\varnothing 13.7$ B = $\varnothing 16.0^{+0.03}$ C = 2.4 D = $3.2^{+0.03}$</p> <p>Dimension: mm</p>
Nominal Capacity	120mAh	
Continuous Standard Load	15K Ω	
Operating Temperature	-20° - 60°C	
Weight	2.0g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics

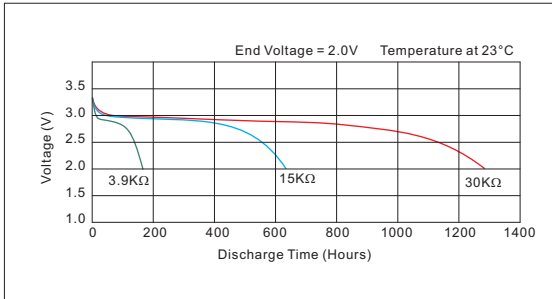


Temperature Characteristics

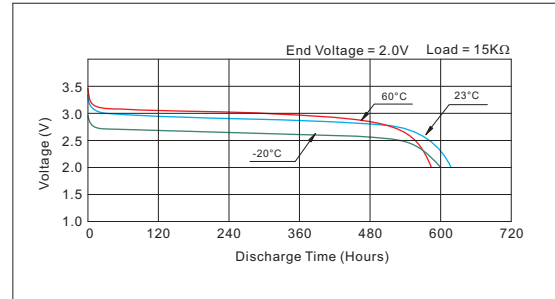


Load vs. Operating Voltage

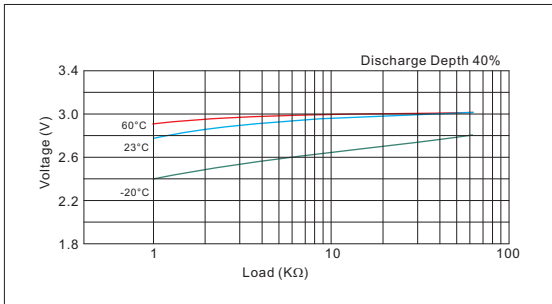


Load vs. Capacity

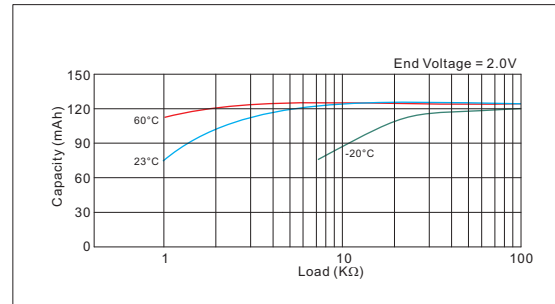

Pulse Discharge Characteristics

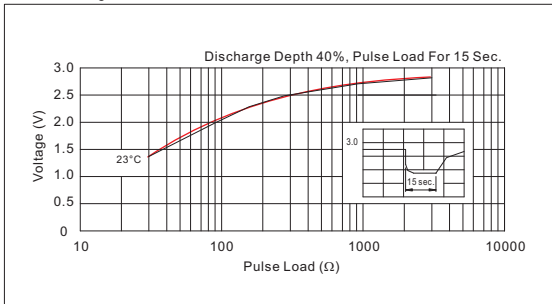

Storage Characteristics

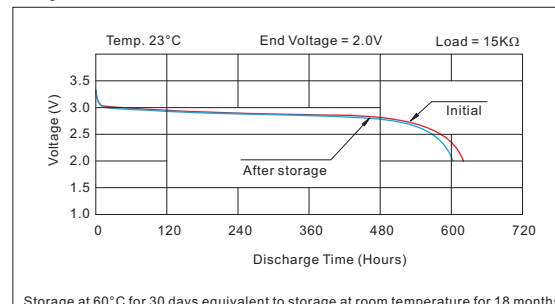

Storage at 60°C for 30 days equivalent to storage at room temperature for 18 months