

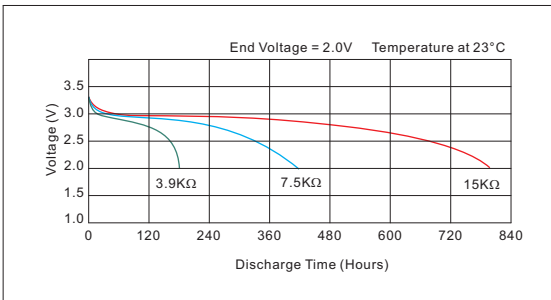


CR2025 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = $\phi 17.6$ B = $\phi 20.0^{+0.03}$ C = 1.9 D = $2.5^{+0.03}$</p> <p>Dimension: mm</p> 
Nominal Capacity	150mAh	
Continuous Standard Load	15K Ω	
Operating Temperature	-20° - 60°C	
Weight	2.6g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics




Temperature Characteristics

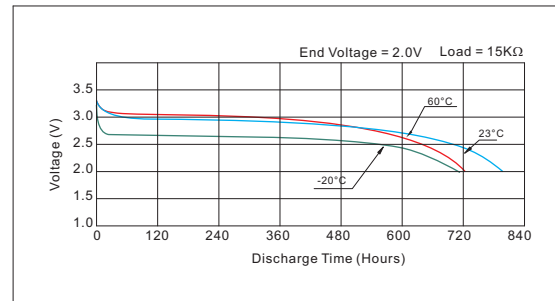


Load vs. Operating Voltage

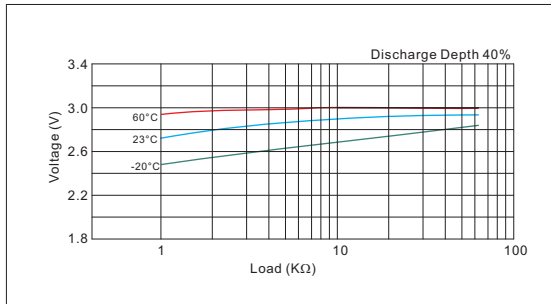


Load vs. Capacity

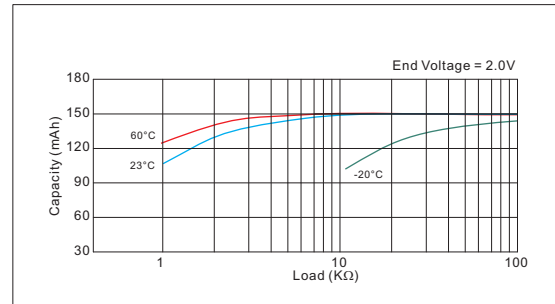

Pulse Discharge Characteristics

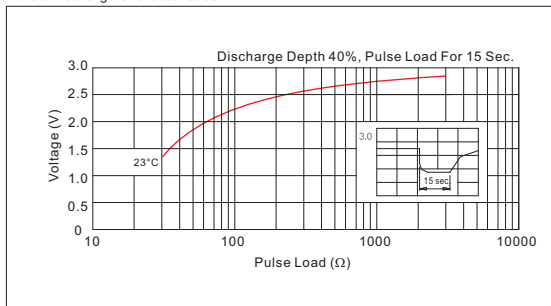

Storage Characteristics

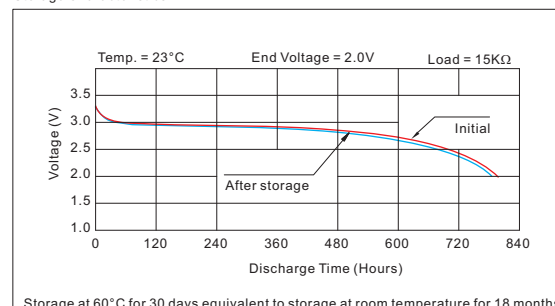

Storage at 60°C for 30 days equivalent to storage at room temperature for 18 months