

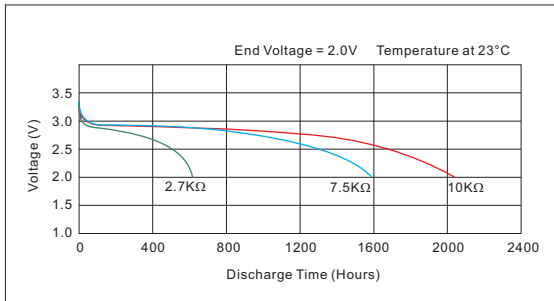


CR2450 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>Dimension: mm</p> <p>A = $\varnothing 21.0$ B = $\varnothing 24.5^{+0.05}$ C = 2.7 D = $5.0^{+0.05}$</p> 
Nominal Capacity	600mAh	
Continuous Standard Load	7.5K Ω	
Operating Temperature	-20° - 60°C	
Weight	6.6g	
Max. Continuous Discharge	1mA	
Max. Pulse Discharge	15mA	


Discharge Characteristics




Temperature Characteristics

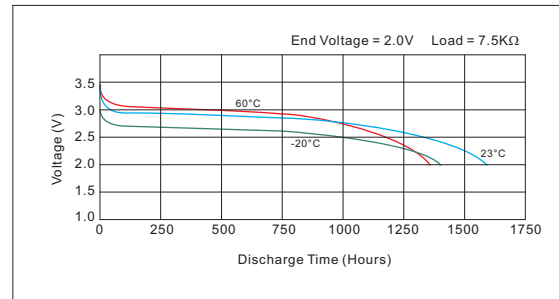


Load vs. Operating Voltage

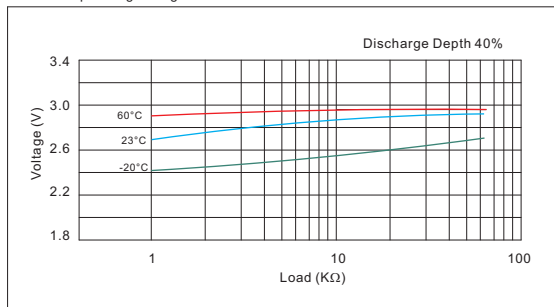

Load vs. Capacity

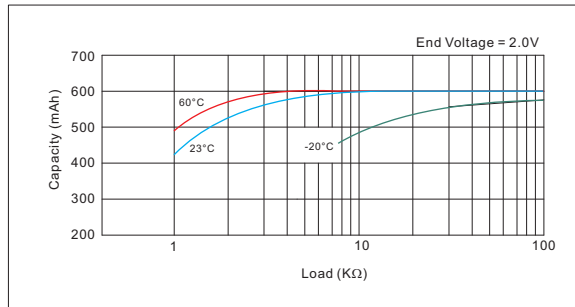

Pulse Discharge Characteristics

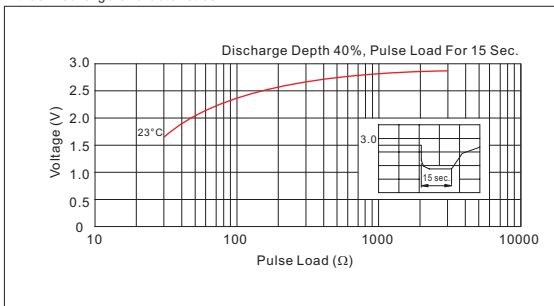

Storage Characteristics

