

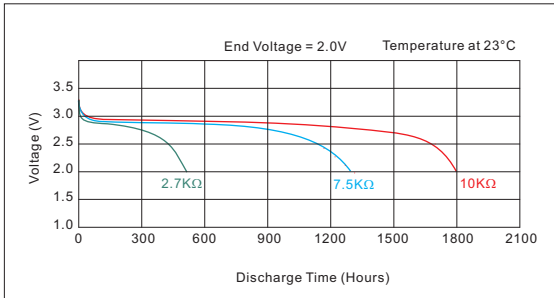


CR3032 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>Dimension: mm</p> <p>A = $\varnothing 27.3$ B = $\varnothing 30.0^{+0.05}$ C = 2.5 D = $3.2^{+0.05}$</p> 
Nominal Capacity	500mAh	
Continuous Standard Load	7.5K Ω	
Operating Temperature	-20° - 60°C	
Weight	6.8g	
Max. Continuous Discharge	1mA	
Max. Pulse Discharge	20mA	


Discharge Characteristics




Temperature Characteristics

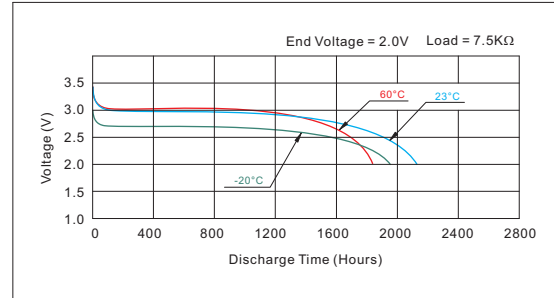


Load vs. Operating Voltage

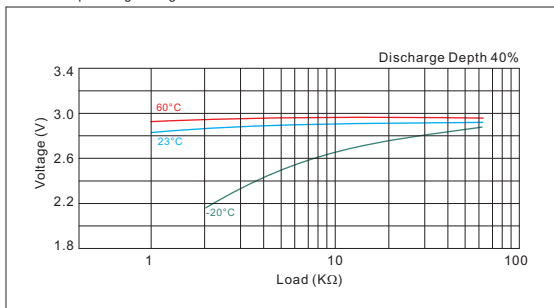

Load vs. Capacity

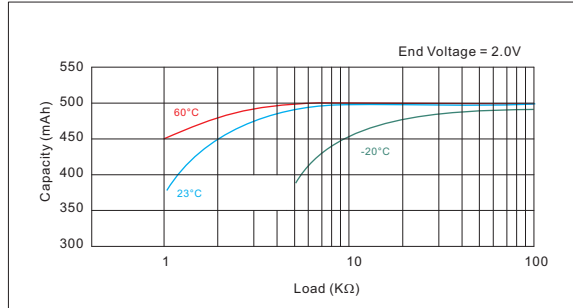

Pulse Discharge Characteristics

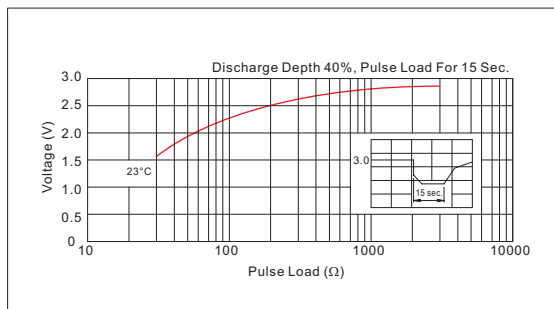

Storage Characteristics

