

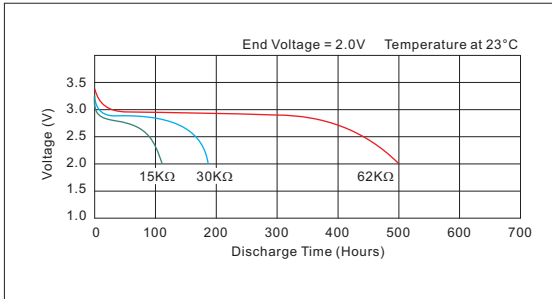


CR927 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>Dimension: mm</p> <p>A = $\varnothing 7.4$ B = $\varnothing 9.5^{+0.2}$ C = 2.1 D = $2.7^{+0.2}$</p> 
Nominal Capacity	30mAh	
Continuous Standard Load	62K Ω	
Operating Temperature	-20° - 60°C	
Weight	0.6g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics




Temperature Characteristics

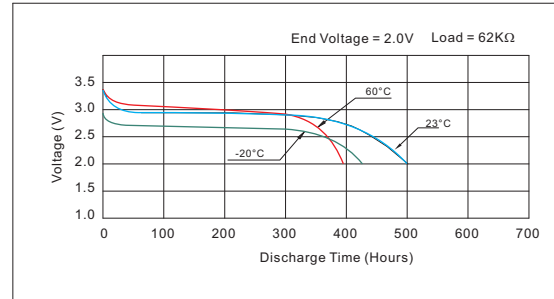


Load vs. Operating Voltage

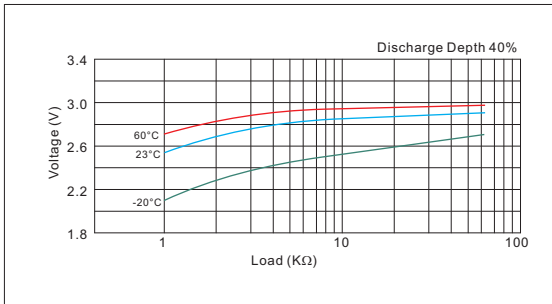

Load vs. Capacity

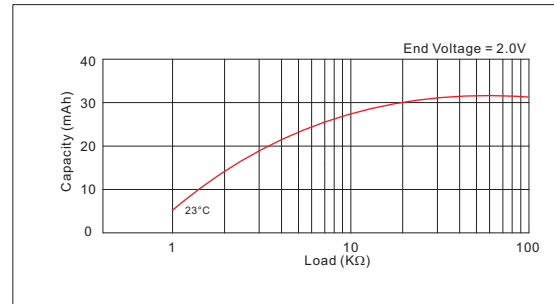

Pulse Discharge Characteristics

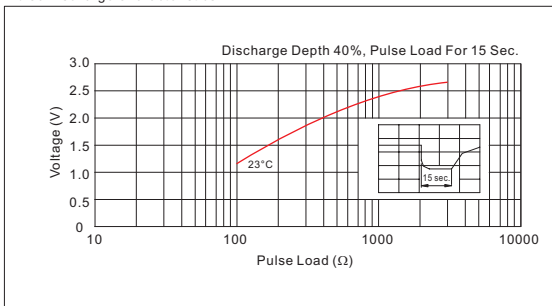

Storage Characteristics

