


## CR927 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	30mAh
Continuous Standard Load	68K $\Omega$
Operating Temperature	-20° - 60°C
Weight	0.7g
Max. Continuous Discharge	0.2mA
Max. Pulse Discharge	5mA




A =  $\varnothing 8.1$   
 B =  $\varnothing 10.0^{+0.02}$   
 C = 1.7  
 D =  $2.5^{+0.05}$


Dimension: mm




Discharge Characteristics

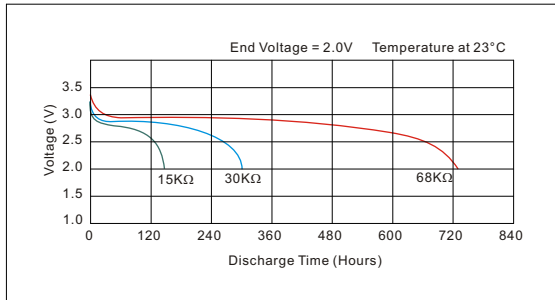


Temperature Characteristics

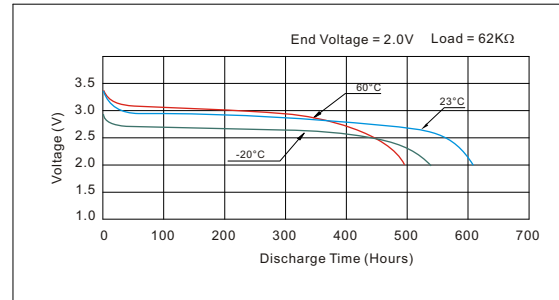


Load vs. Operating Voltage

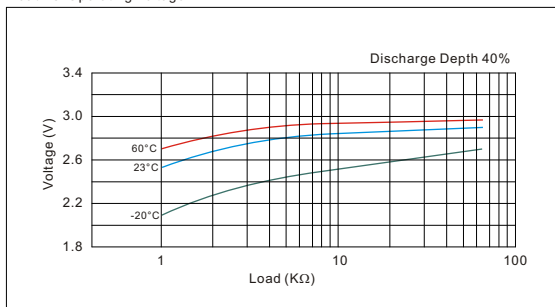


Load vs. Capacity

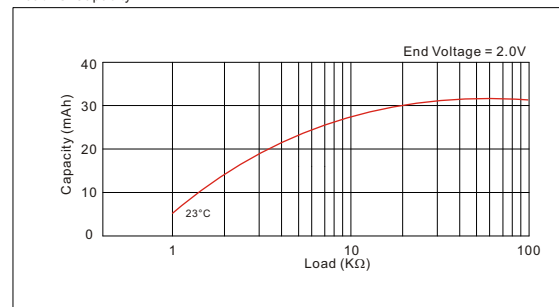

Pulse Discharge Characteristics

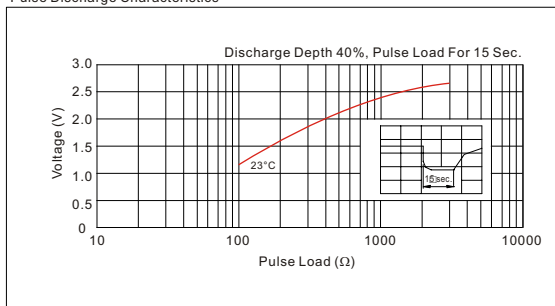

Storage Characteristics

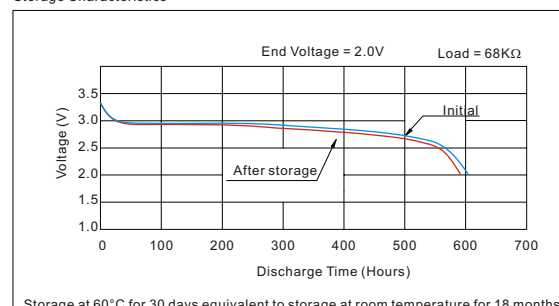

**WARNING:** Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

\*\*Note: The data in this document are for descriptive purposes only and subject to change without prior notice.