


CR1616 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	50mAh
Continuous Standard Load	30KΩ
Operating Temperature	-20° - 60°C
Weight	1.2g
Max. Continuous Discharge	0.2mA
Max. Pulse Discharge	5mA




A = $\varnothing 13.8$
 B = $\varnothing 16.0^{+0.03}$
 C = 1.3
 D = $1.6^{+0.03}$


Dimension: mm




Discharge Characteristics

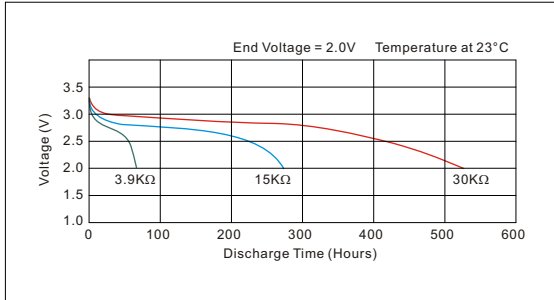


Temperature Characteristics

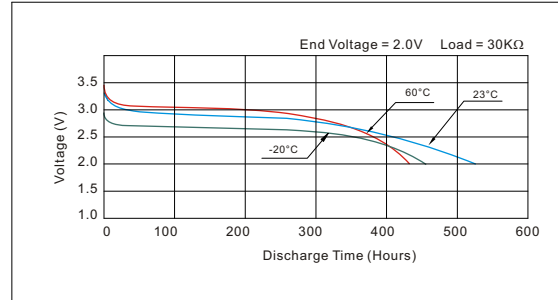


Load vs. Operating Voltage

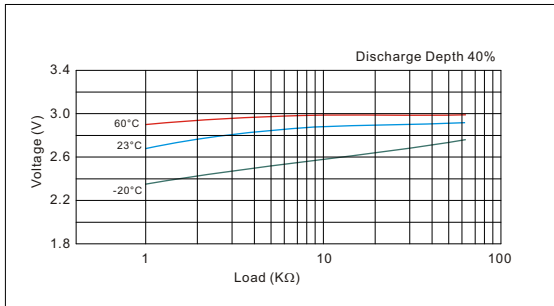


Load vs. Capacity

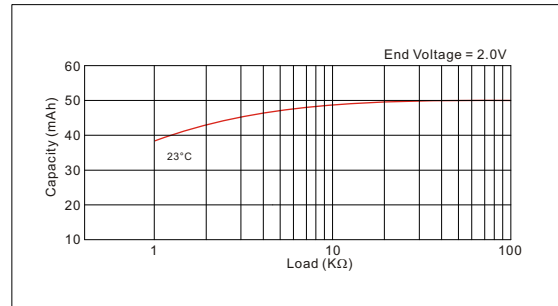

Pulse Discharge Characteristics

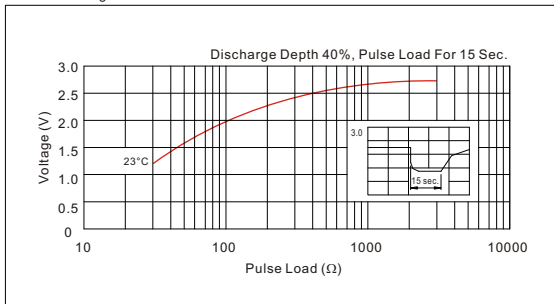

Storage Characteristics

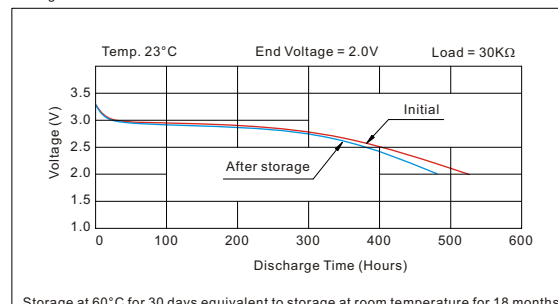

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.