

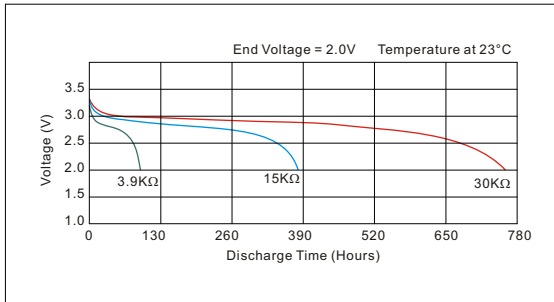


## CR1620 Specification


### Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = <math>\varnothing 13.7</math>                  B = <math>\varnothing 16.0^{+0.03}</math>                  C = 1.6                  D = <math>2.0^{+0.05}</math></p> <p>Dimension: mm</p> 
Nominal Capacity	70mAh	
Continuous Standard Load	30K $\Omega$	
Operating Temperature	-20° - 60°C	
Weight	1.3g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics




Temperature Characteristics

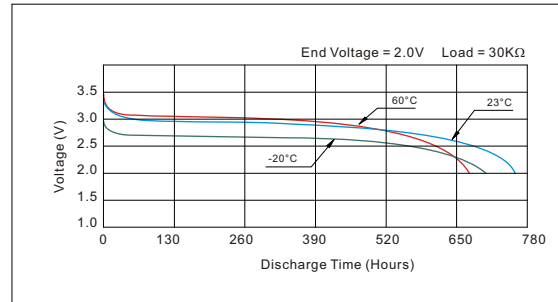


Load vs. Operating Voltage

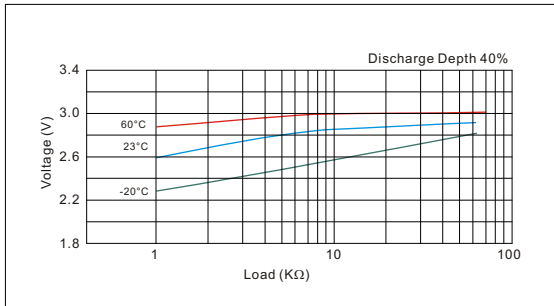


Load vs. Capacity

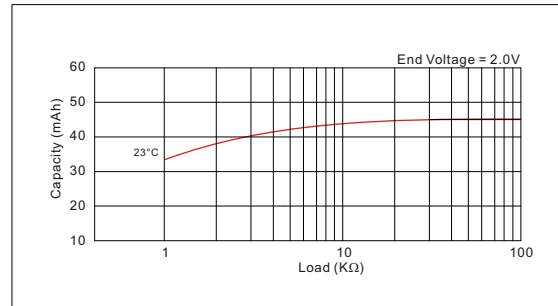

Pulse Discharge Characteristics

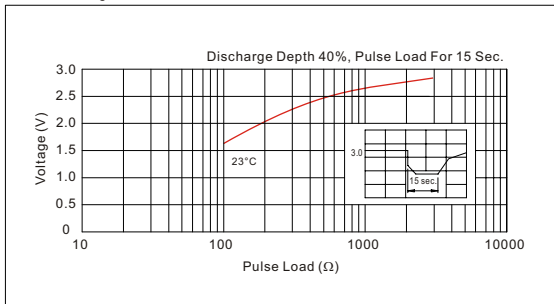

Storage Characteristics

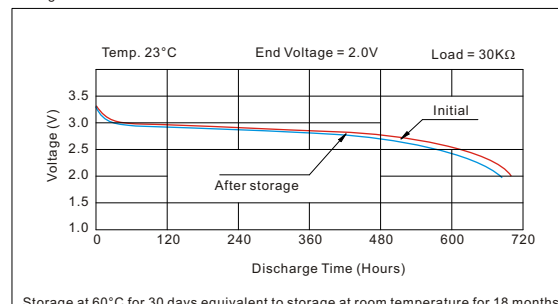

**WARNING:** Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

\*\*Note: The data in this document are for descriptive purposes only and subject to change without prior notice.