



CR1632 Specification

Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	120mAh
Continuous Standard Load	15K Ω
Operating Temperature	-20° - 60°C
Weight	2.0g
Max. Continuous Discharge	0.2mA
Max. Pulse Discharge	5mA




A = \varnothing 13.7
 B = \varnothing 16.0^{+0.03}
 C = 2.4
 D = 3.2^{+0.05}




Dimension: mm


Discharge Characteristics

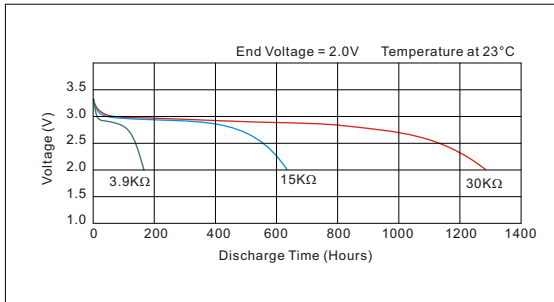


Temperature Characteristics

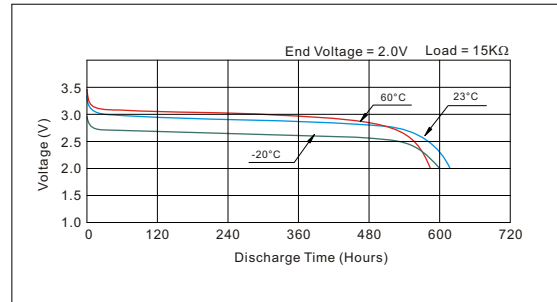


Load vs. Operating Voltage

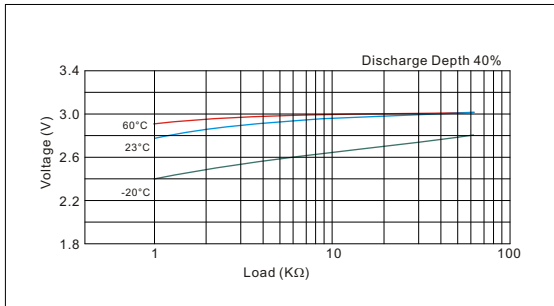


Load vs. Capacity

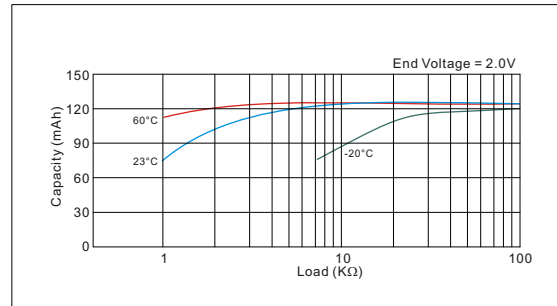

Pulse Discharge Characteristics

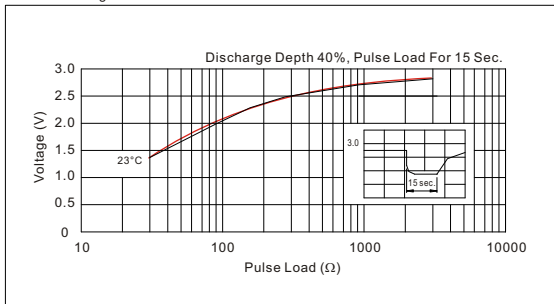

Storage Characteristics

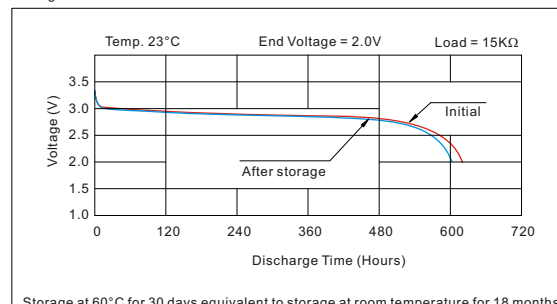

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

****Note:** The data in this document are for descriptive purposes only and subject to change without prior notice.