

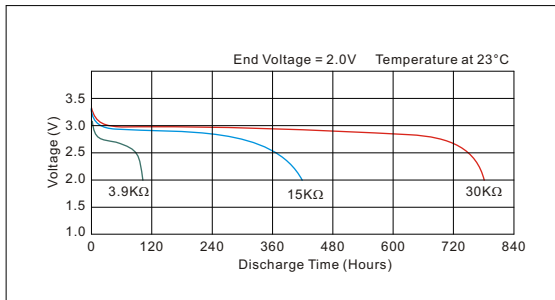


CR2016 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = $\varnothing 17.5$ B = $\varnothing 20.0^{+0.03}$ C = 1.2 D = $1.6^{+0.0}$</p> <p>Dimension: mm</p> 
Nominal Capacity	75mAh	
Continuous Standard Load	30K Ω	
Operating Temperature	-20° - 60°C	
Weight	1.6g	
Max. Continuous Discharge	0.2mA	
Max. Pulse Discharge	5mA	


Discharge Characteristics




Temperature Characteristics

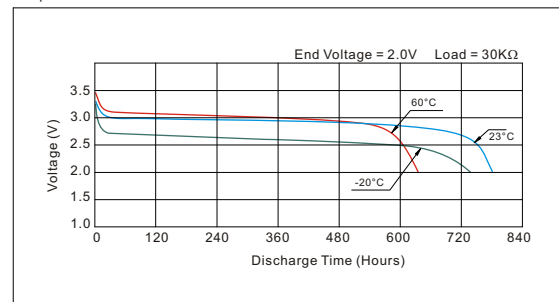


Load vs. Operating Voltage

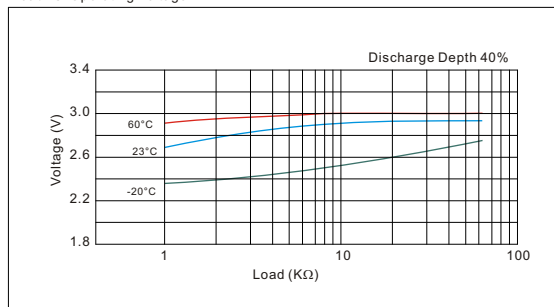


Load vs. Capacity

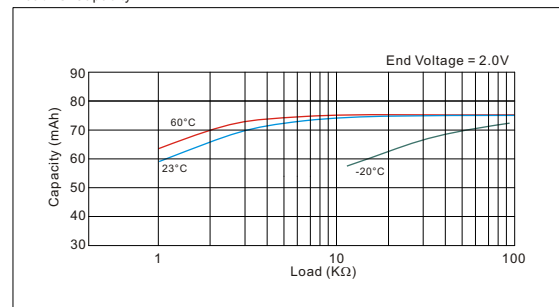

Pulse Discharge Characteristics

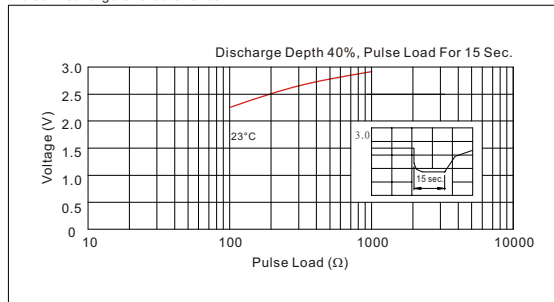

Storage Characteristics

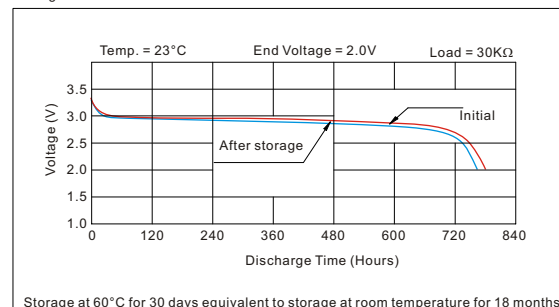

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.