

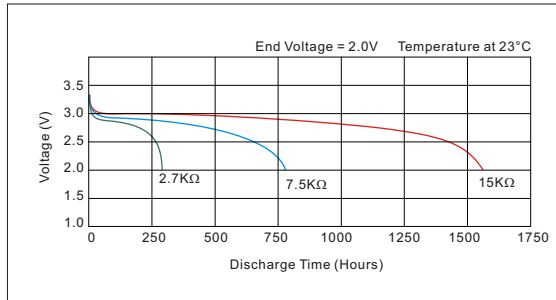


CR2430 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = $\varnothing 21.0$ B = $\varnothing 24.5^{+0.05}$ C = 2.3 D = $3.0^{+0.05}$</p> <p>Dimension: mm</p> 
Nominal Capacity	270mAh	
Continuous Standard Load	15K Ω	
Operating Temperature	-20° - 70°C	
Weight	4.5g	
Max. Continuous Discharge	1mA	
Max. Pulse Discharge	15mA	


Discharge Characteristics




Temperature Characteristics

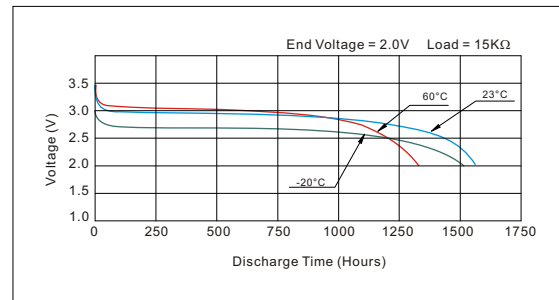


Load vs. Operating Voltage

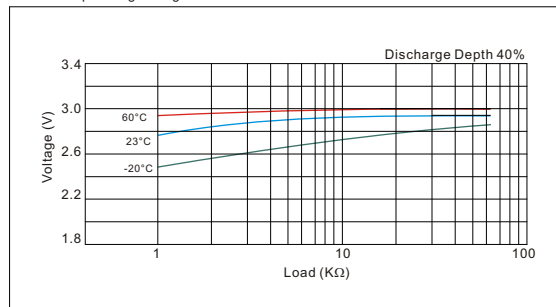


Load vs. Capacity

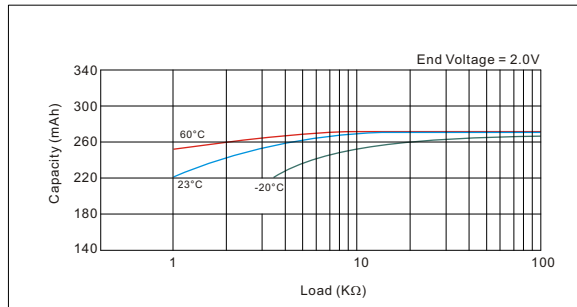

Pulse Discharge Characteristics

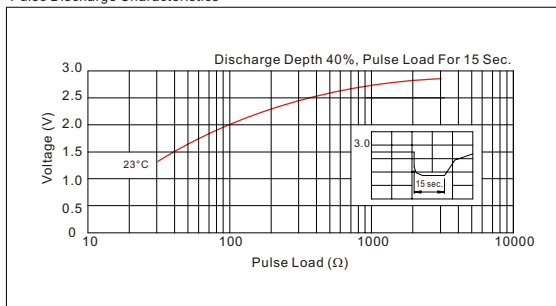

Storage Characteristics

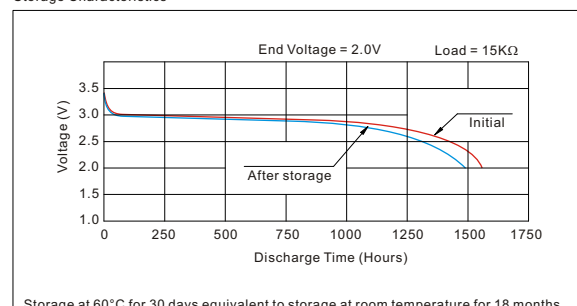

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.