

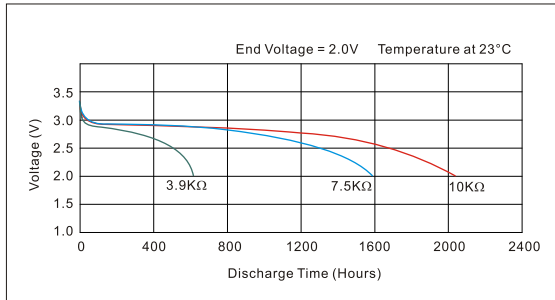


CR2450-PH Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V	 <p>A = $\varnothing 21.7$ B = $\varnothing 24.5^{+0.15}$ C = 3.60 Max D = $5.0^{+0.15}$</p> <p>Dimension: mm</p> 
Nominal Capacity	620mAh	
Continuous Standard Load	7.5K Ω	
Operating Temperature	-20° - 65°C	
Weight	6.9g	
Max. Continuous Discharge	6mA	
Max. Pulse Discharge	30mA	


Discharge Characteristics




Temperature Characteristics

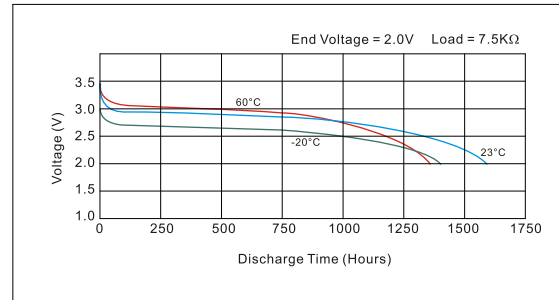


Load vs. Operating Voltage

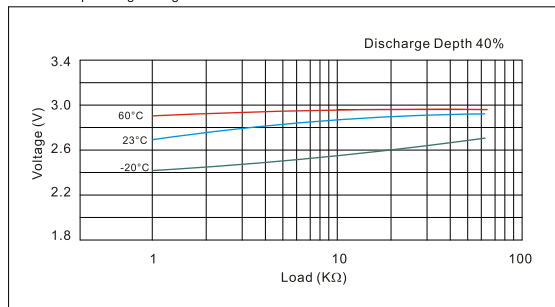


Load vs. Capacity

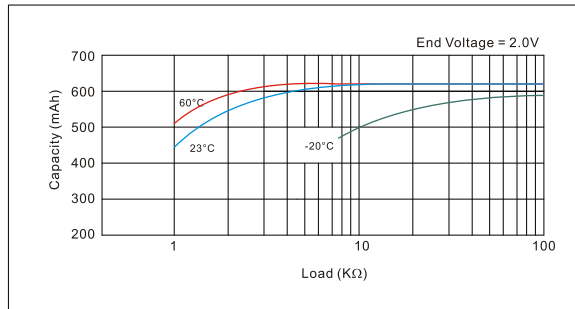

Pulse Discharge Characteristics

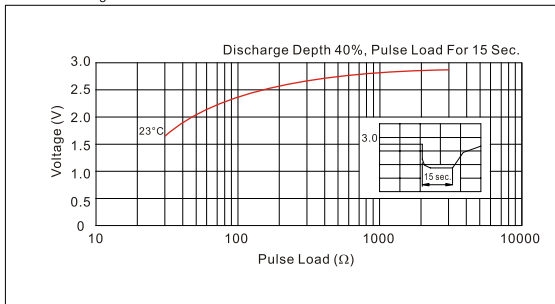

Storage Characteristics

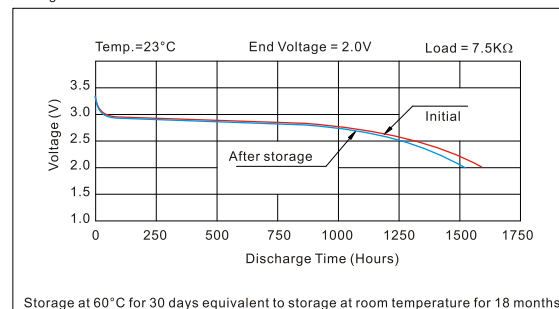

WARNING: Risk of fire and burn. Do not recharge, over-discharge, disassemble, heat above 100°C or incinerate.

****Note:** The data in this document are for descriptive purposes only and subject to change without prior notice.