


CR2477 Specification


Primary Lithium Manganese Dioxide Battery

Nominal Voltage	3V
Nominal Capacity	1000mAh
Continuous Standard Load	4.7K Ω
Operating Temperature	-20° - 60°C
Weight	10.5g
Max. Continuous Discharge	1mA
Max. Pulse Discharge	15mA




A = $\varnothing 21.0$
 B = $\varnothing 24.5^{+0.05}$
 C = 6.8
 D = $7.7^{+0.05}$


Dimension: mm




Discharge Characteristics

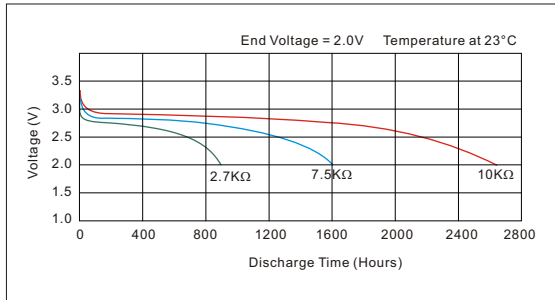


Temperature Characteristics

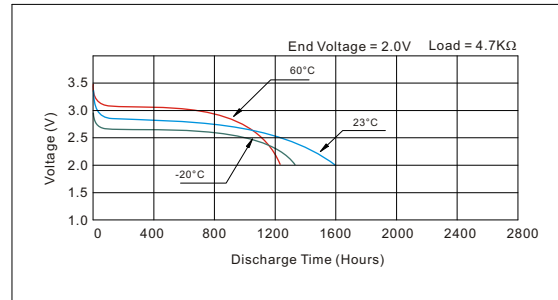


Load vs. Operating Voltage

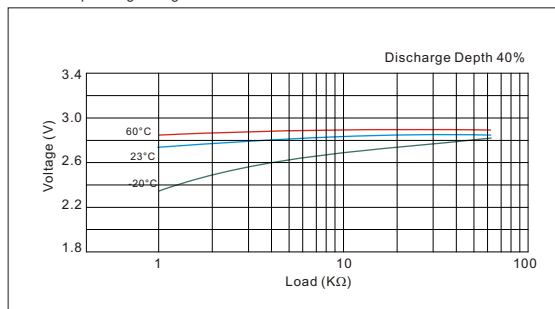


Load vs. Capacity

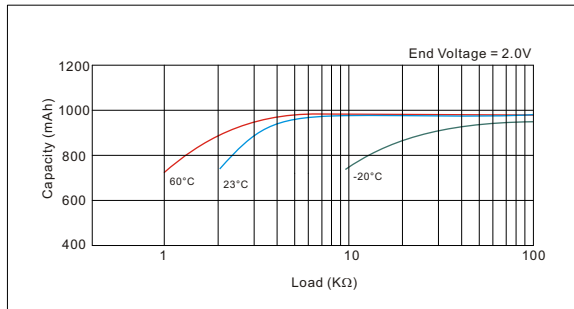

Pulse Discharge Characteristics

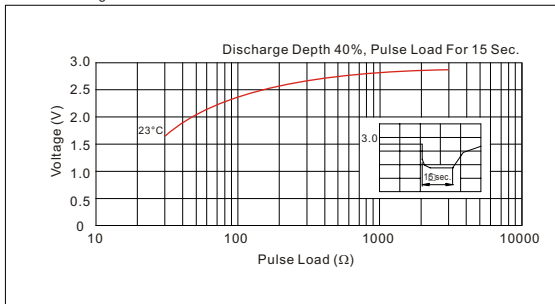

Storage Characteristics

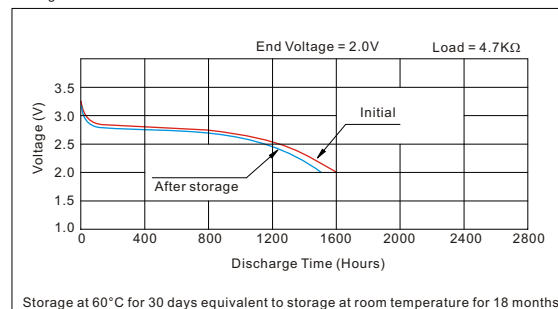

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.