




Equivalent Size: CC

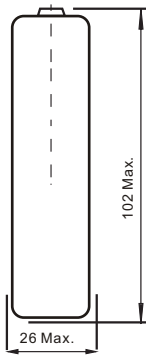

Available Terminations	
-/P*	Axial Pin
-/T /PT2*	Radial Pin
-/PT /TP*	Polarized Tab

(*): Reference to standard terminals for single lithium

Dimension in mm

Electrical characteristics

- **Nominal Capacity** 16Ah
Stored for one year or less at 5mA, 25°C, 2.0V cut-off
- **Rated Voltage** 3.6V
- **Max. Recommended Continuous Current** 200mA
Current value is determined to be the level at which the nominal capacity is obtained with an end voltage of 2.0V at 25°C
- **Max. Pulse Current** 400mA
Typically up to 400mA. (400mA/0.1 second pulses, drained every 2 min at +25°C from undischarged cells with 10µA base current, yield voltage readings above 2.7V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions.
- **Storage (Recommended Max. Temperature)** 30°C
- **Operating Temperature Range** -55°C~ +85°C
- **Approximate Weight** ~100g

ER261020 Specification

Primary Lithium Thionyl Chloride
3.6V, 16Ah

Key Features

- High and stable operating voltage
- Low self-discharge rate - around 1% after 1 year of storage at +20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Compliant with IEC 60086-4 safety standard
- Non-flammable electrolyte




UL Component Recognition
File Number MH45330


Main Applications

- Alarm and security devices
- Smoke detectors
- Memory back-up
- Alarm equipment
- Industrial electronics
- Medical equipment etc.


Typical Discharge Profile At 25°C

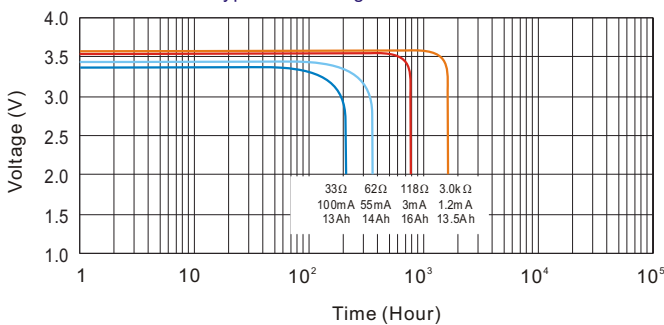


Storage Characteristics

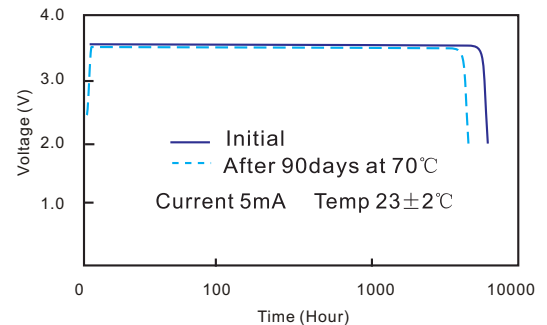

Capacity vs Current vs Temperature

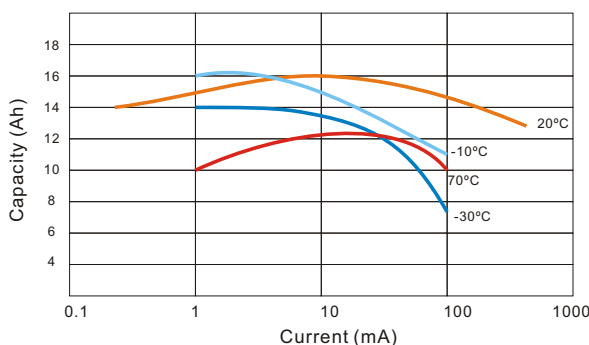

Voltage vs Current vs Temperature

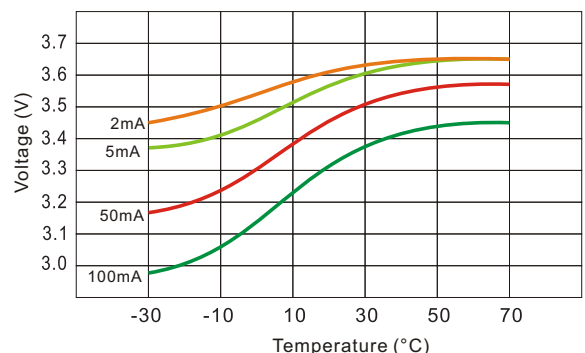

WARNING: Risk of fire and burn. Do not recharge, over-discharge, disassemble, heat above 100°C or incinerate.

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.