
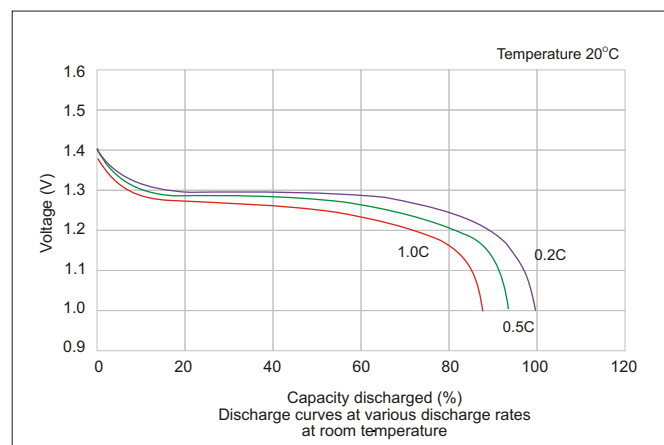
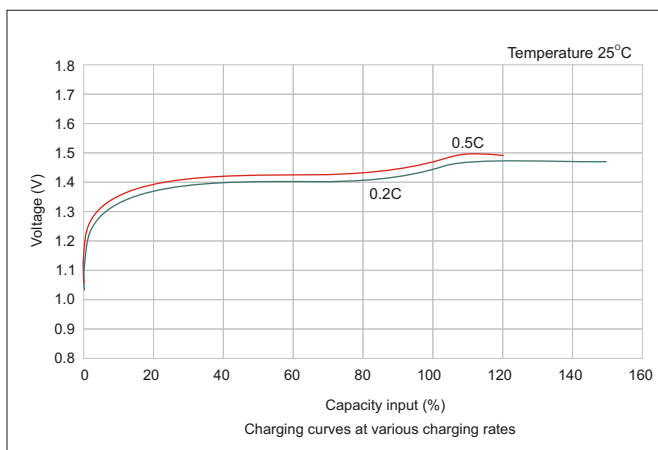


**MH-2300AAH Specification**  
 NiMH Cylindrical Battery  
 Size: AA IEC: KR15/51

**Typical Characteristics**

Model: MH-2300AAH	
Specifications	
Nominal Voltage (V) 1.2V	
Capacity	Typical (mAh) 2200
	Minimum (mAh) 2150
Dimension	Diameter (mm) 14.5 <sup>+0</sup> <sub>-0.7</sub>
	Height (mm) 50.5 <sup>+0</sup> <sub>-1.5</sub>
Charging	Standard 215mA(0.1C <sub>5</sub> ) x 16 hrs
	Rapid 1075mA(0.5C <sub>5</sub> ) x 2.3 hrs -ΔV = 5mV
	Trickle 107mA(0.05C <sub>5</sub> ) x 48 hrs
Operating Temperature (°C)	Standard Charging 0 ~ 45°C
	Rapid Charging 10 ~ 40°C
	Discharging -20 ~ 60°C
	Storage -20 ~ 35°C
Service Life	>500 cycles (IEC standard)
Internal Resistance	30m Ohm (upon fully charged)
Weight	Approx.31g
Cuff-off Voltage (V)	1.00

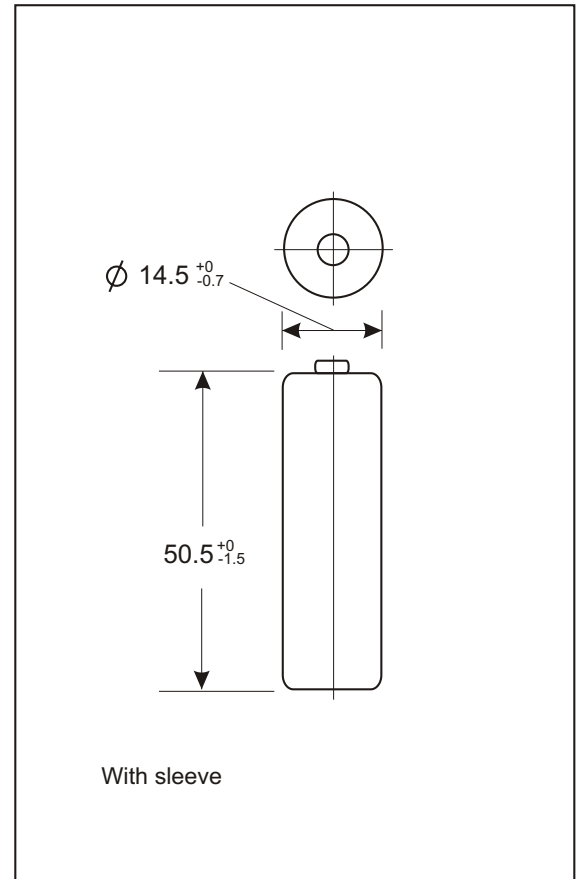

\*\*Note: The data in this document are for descriptive purposes only and subject to change without prior notice.