




MH-250N7 Specification

NiMH Cylindrical Battery

Size: 6F22

Typical Characteristics

Model: MH-200N7		
Specifications		
Nominal Voltage (V)		
8.4V		
Capacity	Typical (mAh)	270mAh
	Minimum (mAh)	250mAh
Dimension	Height:	Max. 48.5mm
	Width:	Max.26.5mm
	Thickness:	Max.17.0mm
Charging	Standard	25mA(0.1C ₅) x 16 hrs
	Rapid	250mA(1C ₅) x 1.2 hrs -ΔV = 70mV
	Trickle	6-10mA
Operating Temperature (°C)	Standard Charging	0 ~ 45°C
	Rapid Charging	10 ~ 45°C
	Discharging	-20 ~ 60°C
	Storage	-20 ~ 35°C
Service Life	>500 cycles (IEC standard)	
Weight	Approx.51.5g	
Cuff-off Voltage (V)	7.00	

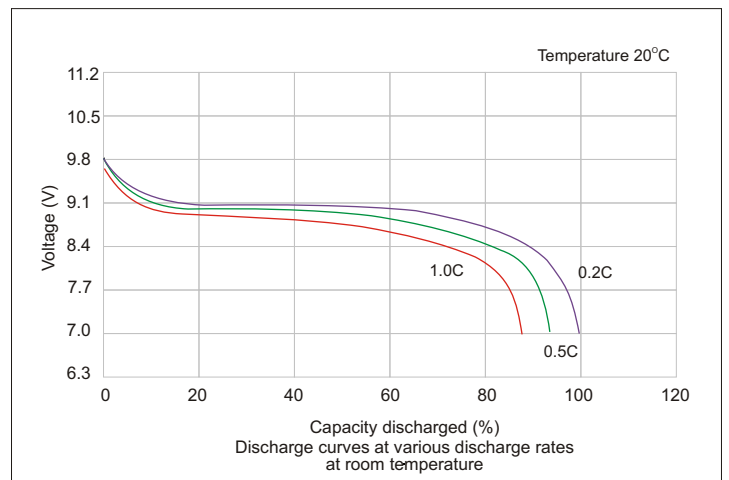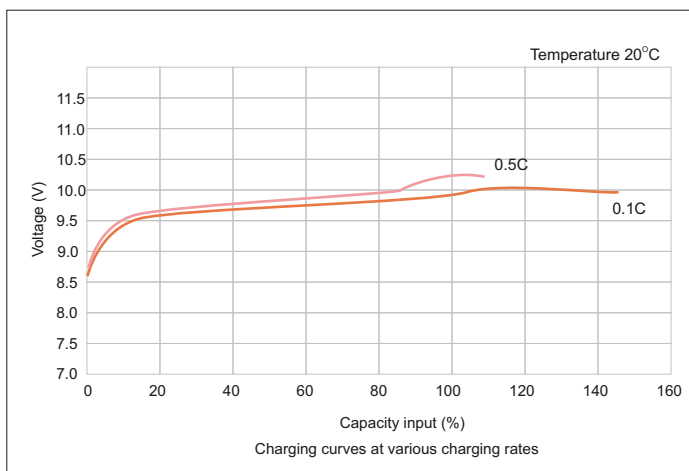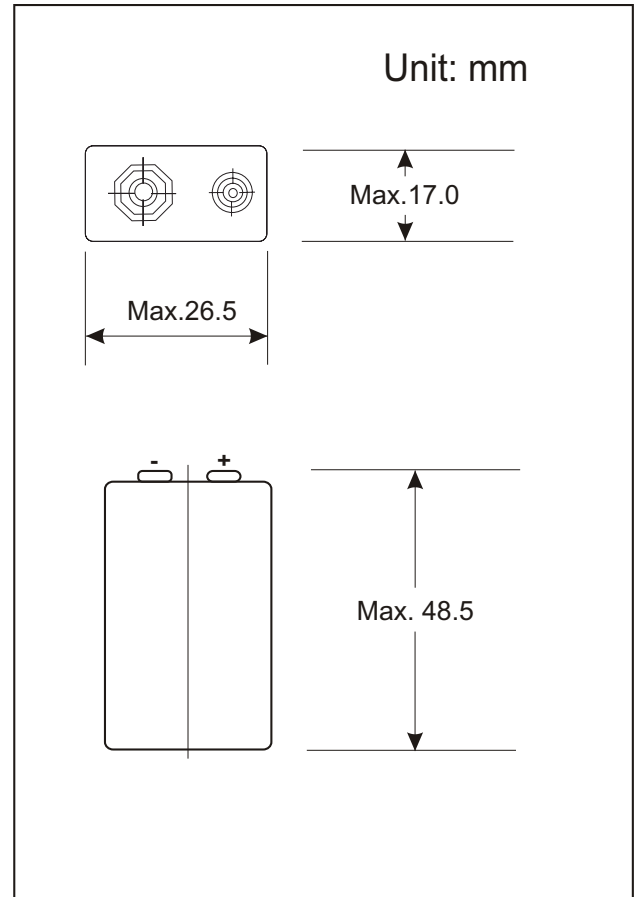

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.