




MH-250N7 Specification

NiMH Cylindrical Battery

Size: 6F22

Typical Characteristics

Model: MH-200N7	
Specifications	
Nominal Voltage (V) 8.4V	
Capacity	Typical (mAh) 270mAh
	Minimum (mAh) 250mAh
Dimension	Height: Max. 48.5mm
	Width: Max.26.5mm
	Thickness: Max.17.0mm
Charging	Standard 25mA(0.1C ₅) x 16 hrs
	Rapid 250mA(1C ₅) x1.2 hrs -ΔV = 70mV
	Trickle 6-10mA
Operating Temperature (°C)	Standard Charging 0 ~ 45°C
	Rapid Charging 10 ~ 45°C
	Discharging -20 ~ 60°C
	Storage -20 ~ 35°C
Service Life	>500 cycles (IEC standard)
Weight	Approx.51.5g
Cuff-off Voltage (V)	7.00

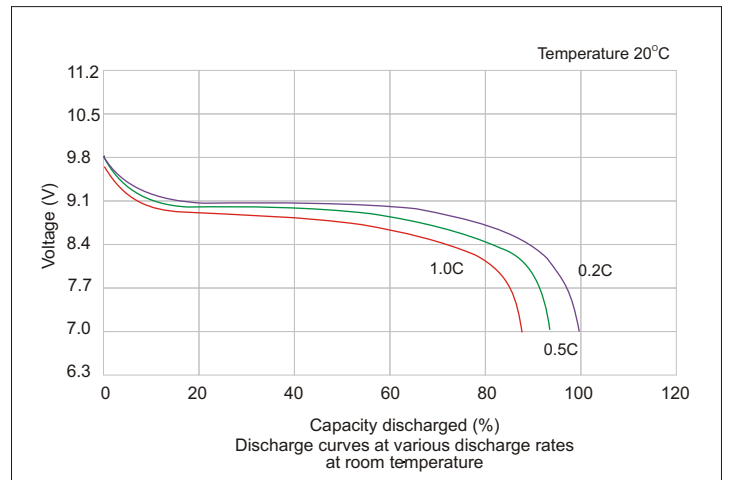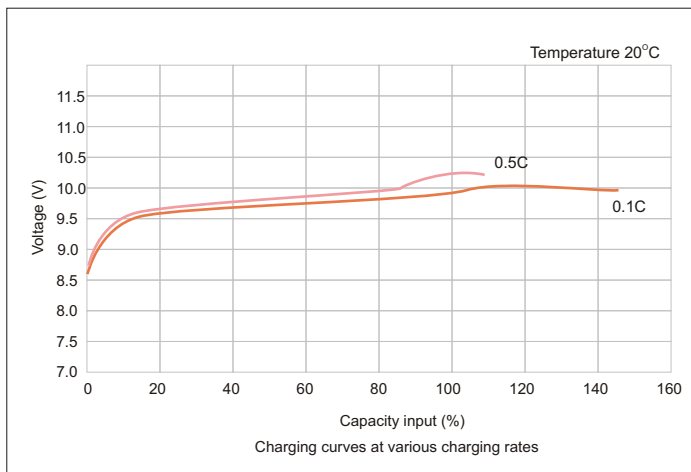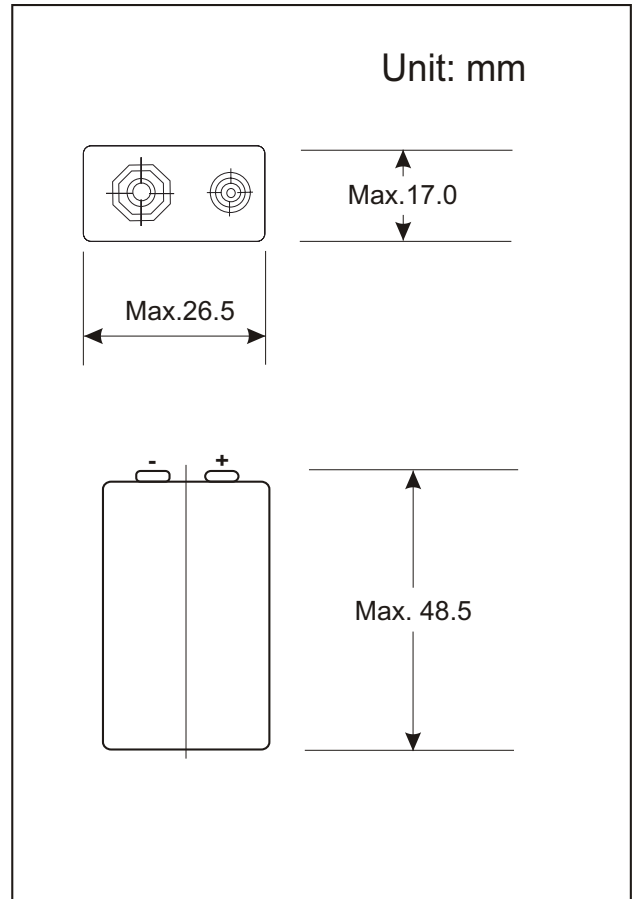

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.