

Unit:mm

Electrical characteristics

■ Nominal Capacity	550mAh
Stored for one year or less at 0.5mA, 20°C, 2.0V cut-off	
■ Rated Voltage	3.6V
■ Max. Recommended Continuous Current	4mA
Current value is determined to be the level at which the nominal capacity is obtained with an end voltage of 2.0V at 20°C	
■ Max. Pulse Current	15mA
Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 20°C	
■ Storage (Recommended Max. Temperature)	30°C
■ Operating Temperature Range	-55°C~ +80°C
■ Approximate Weight	10g

ER2286 Specification

Primary Lithium Thionyl Chloride
3.6V, 550mAh

Key Features

- High and stable operating voltage
- Low self-discharge rate - less than 1% after 1 year of storage at +20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport




UL Component Recognition
File Number MH45330


Main Applications

- Alarm and security devices
- Smoke detectors
- Memory back-up
- Alarm equipment
- Industrial electronics
- Medical equipment etc.



Discharge Performance (25°C)

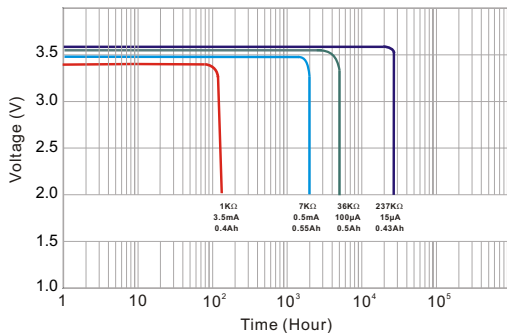

Storage Characteristics

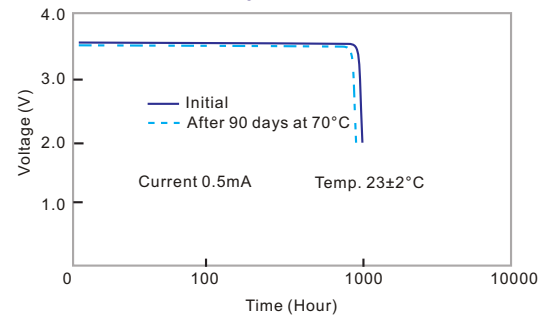

Capacity vs Current vs Temperature

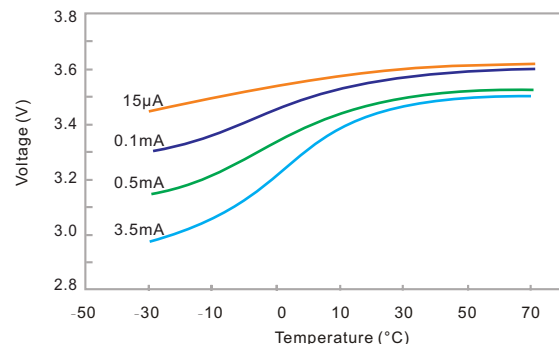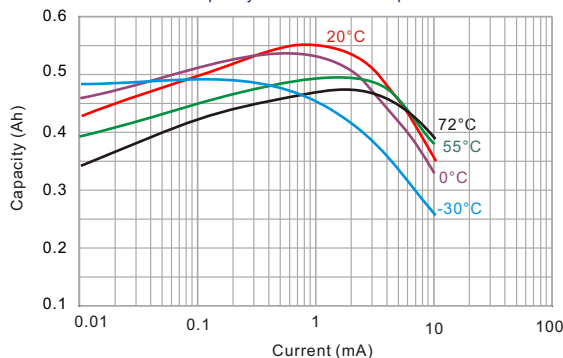

WARNING: Risk of fire and burn. Do not recharge, disassemble, heat above 100°C or incinerate. Do not mix fresh batteries with used batteries.